

# VTS 250

## Medium Duty Gas Service

### DESIGN/CONSTRUCTION

- 2" (50.8 mm) gauges – steel
- Diaphragm 1.3" (28.7 mm) and 1.75" (44.5 mm) – fabric reinforced neoprene

### DIMENSIONS


6.5" W x 5.63" H x 6.13" D  
(165.1 mm x 143.0 mm x 155.7 mm)

### WEIGHT

4 lb. 10 oz. (2.10 kg)

### PERFORMANCE

Maximum inlet – 3000 PSIG

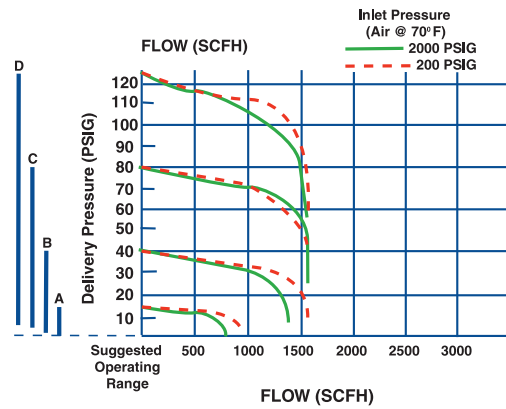

Gas Service	Part No.	Model No.	Delivery Range (PSIG)
Air, Oxygen, Inert Gas	0781-3503	VTS 250A-540	2-15
	0781-3507	VTS 250A-580*	2-15
	0781-3504	VTS 250B-540	2-40
	0781-3508	VTS 250B-580	2-40
	0781-3510	VTS 250C-346	4-80
	0781-3505	VTS 250C-540	4-80
	0781-3509	VTS 250C-580*	4-80
	0781-3516	VTS 250C-590	4-80
	0781-3512	VTS 250D-346	5-125
	0781-3506	VTS 250D-540	5-125
0781-3513	VTS 250D-580*	5-125	
Hydrogen	0781-3558	VTS 252A-350	2-15
	0781-3559	VTS 252B-350	2-40
	0781-3563	VTS 252C-350	4-80
	0781-3564	VTS 252D-350	5-125
CO <sub>2</sub>	0781-3569	VTS 253A-320	2-15
	0781-3573	VTS 253B-320*	2-40
	0781-3574	VTS 253C-320*	4-80
	0781-3575	VTS 253D-320	5-125
Acetylene	0781-3583	VTS 260A-300	2-15
	0781-3584	VTS 260A-510	2-15
L.P. Gas	0781-3594	VTS 261B-510	2-40
	0781-3525	VTS 261BL-555	2-40

Outlet Connections: Cylinder Type 9/16"-18(M), \*5/8"-18 RH(F)